

A47

**CDLX**  
MP



CDLX-SM-5-25W



CDLX-MD-15-45W



CDLX-LG-30-80W

**TECHNICAL SPECIFICATIONS:**


- :: Multi-Power Switch is in the Fixture
- :: Housing: Die-cast aluminum with prismatic polycarbonate lens redesigned for LED
- :: 1/2" threaded hubs located on two sides of the housing
- :: Prismatic polycarbonate lens
- :: Beam angle: 150°
- :: Voltage: 120-277V; 60Hz AC
- :: CRI: >80
- :: Power Factor: 90%
- :: Operating Temp: -4°F to 104°F
- :: 70,000 hour rated life
- :: Suitable for Wet Locations, IP65
- :: 7-year warranty

**APPLICATIONS:**

:: Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting



**OPTIONS**  
PHOTOCELL  
MOTION SENSOR  
BATTERY BACKUP

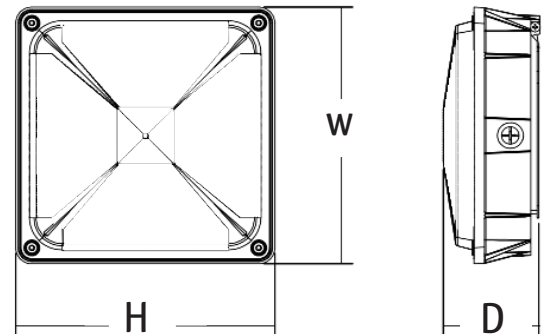

**LED LOW PROFILE CANOPY/GARAGE LIGHT**

CATALOG NO.	WATTS	LPW	COLOR TEMP	BEAM ANGLE	DIMENSIONS
CDLX-SM-5-25W-30K	5W/ 10W/ 15W/ 25W	120LM/W	3000K	150°	8"(L) X 8" (W) X 3"(H)
CDLX-SM-5-25W-40K	5W/ 10W/ 15W/ 25W	120LM/W	4000K	150°	8"(L) X 8" (W) X 3"(H)
CDLX-SM-5-25W-50K	5W/ 10W/ 15W/ 25W	120LM/W	5000K	150°	8"(L) X 8" (W) X 3"(H)
CDLX-MD-15-45W-30K	15W/ 25W/ 35W/ 45W	120LM/W	3000K	150°	10"(L) X 10" (W) X 3 5/8"(H)
CDLX-MD-15-45W-40K	15W/ 25W/ 35W/ 45W	120LM/W	4000K	150°	10"(L) X 10" (W) X 3 5/8"(H)
CDLX-MD-15-45W-50K	15W/ 25W/ 35W/ 45W	120LM/W	5000K	150°	10"(L) X 10" (W) X 3 5/8"(H)
CDLX-LG-30-80W-30K	30W/ 40W/ 60W/ 80W	120LM/W	3000K	150°	14"(L) X 14" (W) X 4"(H)
CDLX-LG-30-80W-40K	30W/ 40W/ 60W/ 80W	120LM/W	4000K	150°	14"(L) X 14" (W) X 4"(H)
CDLX-LG-30-80W-50K	30W/ 40W/ 60W/ 80W	120LM/W	5000K	150°	14"(L) X 14" (W) X 4"(H)