LRS-F

MCT3

LRS-F-MCT-C90-BK

LRS-F-MCT-C90-WH

LRS-F-MCT-C90-MGBR

TECHNICAL SPECIFICATIONS:

:: Multi CCT Switch is Inside Fixture
:: Back plate: Die-Cast Aluminum with Mounting/Gasket Installed
:: Voltage: 120V AC 60Hz
:: Polycarbonate Lens
:: Operating Temp: -4°F to 104°F
:: CRI: ≥ 90
:: Beam Angle: 90° x 110°
:: 70,000 hour rated life
:: 7-year warranty
:: Suitable for Wet Locations, IP44

APPLICATIONS:

:: Ideal for general site lighting, loading docks, doorway, pathway and parking areas.

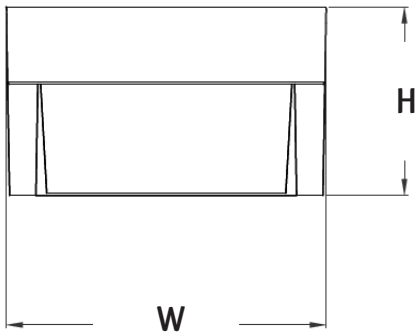

LED ARCHITECTURAL RESIDENTIAL LIGHTS

CATALOG NO.	FINISH	WATTS	LPW	COLOR TEMP	DIMENSIONS
LRS-F-MCT-C90-BK	BLACK	12W	54LM/W	3000K/4000K/5000K	6 3/4"(W) x 4"(H)
LRS-F-MCT-C90-WH	WHITE	12W	54LM/W	3000K/4000K/5000K	6 3/4"(W) x 4"(H)
LRS-F-MCT-C90-MGBR	MARINE GRADE BRONZE	12W	54LM/W	3000K/4000K/5000K	6 3/4"(W) x 4"(H)