

WMC2 SERIES OUTDOOR LIGHTING

WMC2-DL-MCT-BR-DT
WMC2-DL-MCT-BK-DT
WMC2-DL-MCT-BN-DT
WMC2-DL-MCT-WH-DT

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____




MCT
E

Selection:



Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

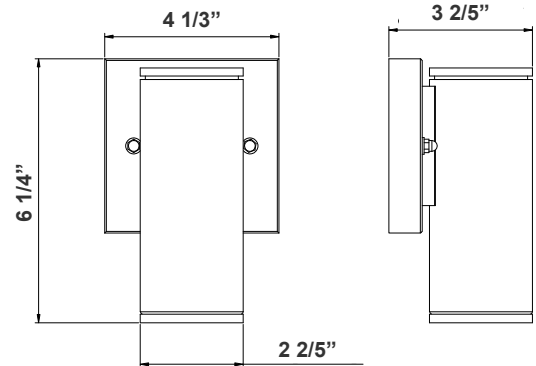

6 1/4" (H) x 4 1/3" (W) x 2 2/5" (D)

Features

- Finish: Black, Bronze, Brushed Nickel & White
- Multi CCT (Selectable Switch on the Back of the Bracket, Protected by Silicon Cover to be Waterproof)
- 7-Year Warranty
- Outdoor Down Light

Technical Specifications

Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 6W
- Efficacy: 66 LPW
- THD: <20%

Mechanical:

- Housing: Die-cast Aluminum & Glass
- Finish: Black, Bronze, Brushed Nickel & White
- Maximum Ambient Temperature: -68°F to 104°F
- IP44, Suitable for Damp Locations
- 7-Year Warranty

Lighting:

- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 400LM
- Color Temperatures: 3000K/4000K/5000K
- Multi CCT (Selectable Switch on the Back of the Bracket, Protected by Silicon Cover to be Waterproof)
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 hrs
- Beam angle: 45°

Applications:

- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

Other Models:

- 12W | 800LM | WMC2-UDL-MCT-BK-DT
- 12W | 800LM | WMC2-UDL-MCT-BR-DT
- 12W | 800LM | WMC2-UDL-MCT-BN-DT
- 12W | 800LM | WMC2-UDL-MCT-WH-DT






Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



WG-Z7-26-2Z

Photometrics: WMC2-DL-MCT-DT

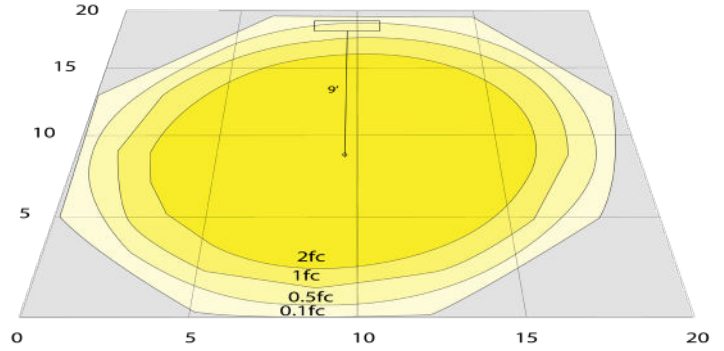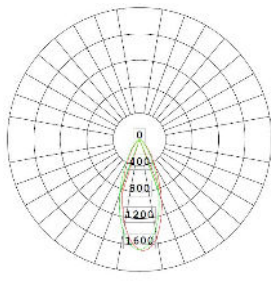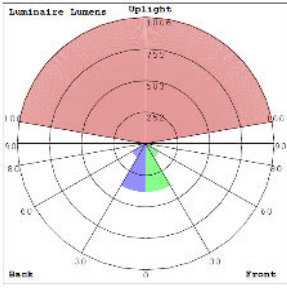

BUG Rating: B1-U1-G0

6W 5000K Area 20'x 20' Mounting Height: 9'

Other Views:

Bronze Finish:



Side View



Front View



Back View



Lens View

Bronze Finish:



Side View



Front View



Back View



Lens View

Brushed Nickel Finish:



Side View



Front View



Back View



Lens View

White Finish:



Side View



Front View



Back View



Lens View



Performance Table: WMC2-DL-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMC2-DL-MCT-BK-DT	6W	120V	400LM	3000K/ 4000K/ 5000K	B1-U1-G0	66
WMC2-DL-MCT-BR-DT	6W	120V	400LM	3000K/ 4000K/ 5000K	B1-U1-G0	66
WMC2-DL-MCT-BN-DT	6W	120V	400LM	3000K/ 4000K/ 5000K	B1-U1-G0	66
WMC2-DL-MCT-WH-DT	6W	120V	400LM	3000K/ 4000K/ 5000K	B1-U1-G0	66

Sample Ordering

Model **Light Direction** **Color Temp.** **Finish** **Dimming**

WMC2 - DL - MCT - - DT

BK = Black
 BR = Bronze
 BN = Brushed Nickel
 WH = White

Factory-Installed Option:

Blank = No Option For Accessories
 OPT-PC-B = FOR 120V-277V PHOTOCELL

Example:

1. WMC2-DL-MCT-BR-DT (FOR WMC2 15W DOWN LIGHT MCT BRONZE FIXTURE 120V)
2. WMC2-DL-MCT-BR-DT OPT-PC-B (FOR WMC2 15W DOWN LIGHT MCT BRONZE FIXTURE 120V) (FOR 120V-277V PHOTOCELL)

FACTORY-INSTALLED OPTION:



OPT-PC-B
 FOR 120V-277V PHOTOCELL

