LFXE SERIES Outdoor Lighting

LFXE-MD-50-100W-MCTP-KN-P

BUILDER SERIES FLOOD/AREA LIGHTS WITH PHOTOCELL

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name:

Project Name:

Note: | Type:

MCTP

SELECTION:

CUSTOM:

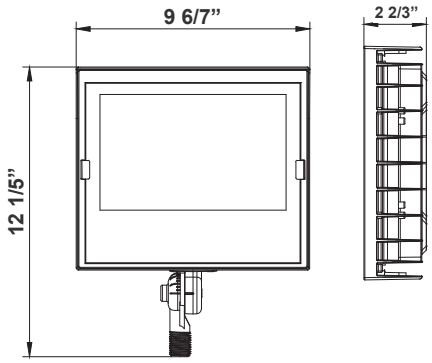

12 1/5”(H) x 9 6/7”(W) x 2 2/3”(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- Optic Lens Type: III
- Multi-CCT Power - The Switch is on the Bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 120~277VAC/50~60 Hz
- Wattage: 50W/80W/100W
- Power Factor: >0.9
- Efficacy: 135 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze and White Finish)
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- Photocell Included (With Disconnect Switch)
- High Conductive Aluminum LED Board
- 90° Adjustable 1/2” Knuckle Mount
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65, Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- Multi-CCT Power - The Switch is on the Bottom of the Fixture
- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13” #18 AWG stranded wires
- Color temperature: 3000K/4000K/5000K
- Total Lumens: 13500LM Max.
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°
- 70,000 Hours Rated Life

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas
- Replace existing HID flood lights/ wall packs

Other Models:

- 100W | 13500LM | LFXE-MD-50-100W-MCTP-TR-P

UL LISTED | WET LOCATION | IP65 | DIMMING 0-10V | 7

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |

WG-ZB-Y6-2Z

Photometrics: LFXE-MD-50-100W-MCTP-KN-P





BUG Rating: B3-U0-G1

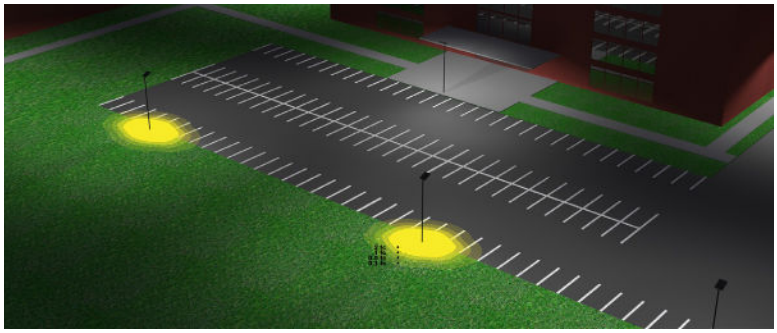

Area 45'x 55' Mounting Height: 20'

Other Views:

Side View

Front View

Back View

Performance Table: LFXE-MD-50-100W-MCTP-KN-P

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFXE-MD-50-100W-MCTP-KN-P	50W	120~277V	6750LM	3000K 4000K 5000K	B3-U0-G1	135
	80W		10800LM			
	100W		13500LM			

Sample Ordering

Model	Size	Min.Wattage	Max.Wattage	Color Temp.	Mount	Photocell
LFXE	MD	50	100W	MCTP	KN	P

Accessories Options

Blank = No Option For Accessories
WRC-3-BRZ =Weatherproof cover with three(3) 1/2" hubs

ACCESSORIES AND MOUNTING OPTIONS

WRC-3-BRZ
Weatherproof cover with Three
(3) 1/2" hubs

B-41

Mounts to landscape post
or any 1/2" hub

Fully adjustable 1/2" threaded knuckle for aiming versatility

Color Options: Custom Color Available

Black Silver White Dark Bronze (Default color) Green Red Yellow

Example:

1. LFXE-MD-50-100W-MCTP-KN-P (For LFXE 50-100W MCTP fixture 120V-277V)

2. LFXE-MD-50-100W-MCTP-KN-P (For LFXE 50-100W MCTP fixture 120V-277V)
   WRC-3-BRZ (Weatherproof cover with three(3) 1/2" hubs)

COLOR CHART: * Choose from one of our Premium Colors with no set-up fee.

Gloss:

SILVER METALLIC 70 GLOSS T357-GR105

SILVER METALLIC 30 GLOSS T353-GR06

DARK RED 90 GLOSS P009-RD02

INTERNATIONAL ORANGE 90 GLOSS T009-OG26

SAFETY ORANGE 90 GLOSS T009-OG01

YELLOW 90 GLOSS T009-YL14

YELLOW 90 GLOSS T009-YL01


TRAFFIC GREEN 70 GLOSS T007-GN16


GREEN 70 GLOSS T007-GN13

GREEN 60 GLOSS C006-GN03

BLUE 90 GLOSS T009-BL01

DARK BLUE 80 GLOSS T008-BL20

RAL 8028 TERRA BROWN 90 GLOSS C209-BR358

Hammer:

WHITE HAMMER T013-WH09

BEIGE HAMMER T013-BG38

GREY HAMMER C013-GR08

SILVER HAMMERTONE T064-GR05

BLACK HAMMER T013-BK62

RED HAMMER T013-RD15

GREEN HAMMER T013-GN220


BLUE HAMMER T013-BL468

BRONZE HAMMER T012-BR161

Texture:

WHITE TEXTURE C031-WH120

FLINT GRAY TEXTURE T243-GR522

BLACK TEXTURE C241-BK109

RED TEXTURE T241-RD129

BLUE TEXTURE C241-BL544

OIL RUBBED BRONZE TEXTURE T291-BR251

Vein:

BLACK/WHITE VEIN T075-WH34

SILVER VEIN T375-BK26

COPPER VEIN EXTERIOR T075-BK211

GOLD VEIN T375-BK10

COPPER VEIN T375-BK07